


Primate Series 3D Printing Materials



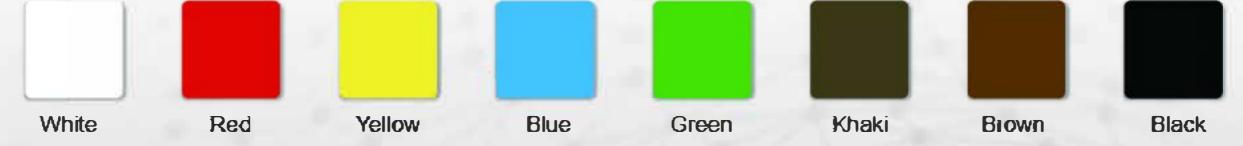

For more shining ideas

Email:sales@3dcadcam.com.tr Tel:+90 2163803948

Web: www.3dcadcam.com.tr



Specification

Material	PLA
Operating temperature	190~225°C
Diameter	1.75 ± 0.03mm
Density	$1.25 \pm 0.05 g/cm^3$
Melt flow rate	5~7g/10min
Water absorption	0.4%
Tensile strength	≥60MPa
Tensile elongation	≥3.0%
Flexural strength	≥90MPa
Charpy impact strength	≥10KJ/m²
Net weight	500kg
Size of reel	200mm
Product features	
1.Professional technical team	Equipped with sophisticated talents
	In cooperation with famous universities
2.Perfect production process	Advanced international stantard production line
	Precisely controlled by PLC
3. Reliable product performance	Eco-friendly
	100% USA original, biodegradable

Notice: More detailed information about the products, please visit our web for inquiry.

Email:sales@3dcadcam.com.tr Tel:+90 2163803948 Web:www.3dcadcam.com.tr